


Local Residential Smart Load Control

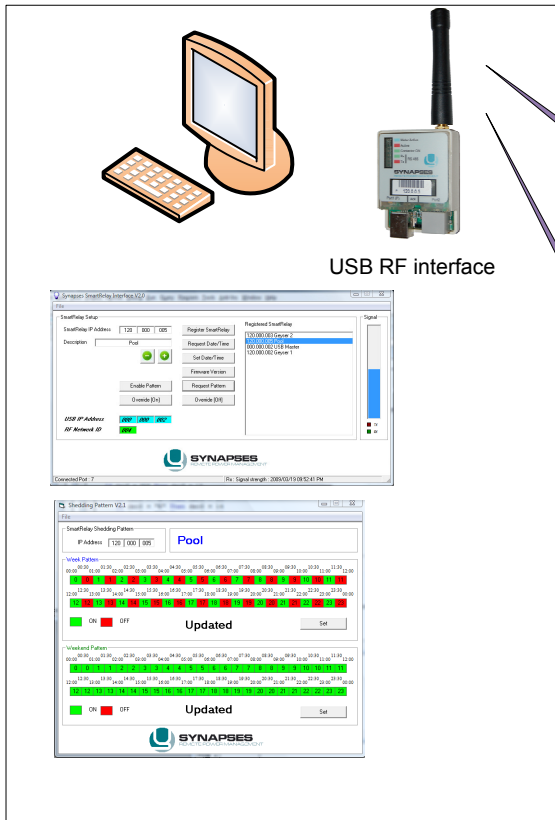


USB RF interface

USB RF Interface


1. Synapses Software for SmartRelay configuration.
2. SmartRelay device list is stored on PC.
3. Unlimited quantity of SmartRelays.

House Distribution Board

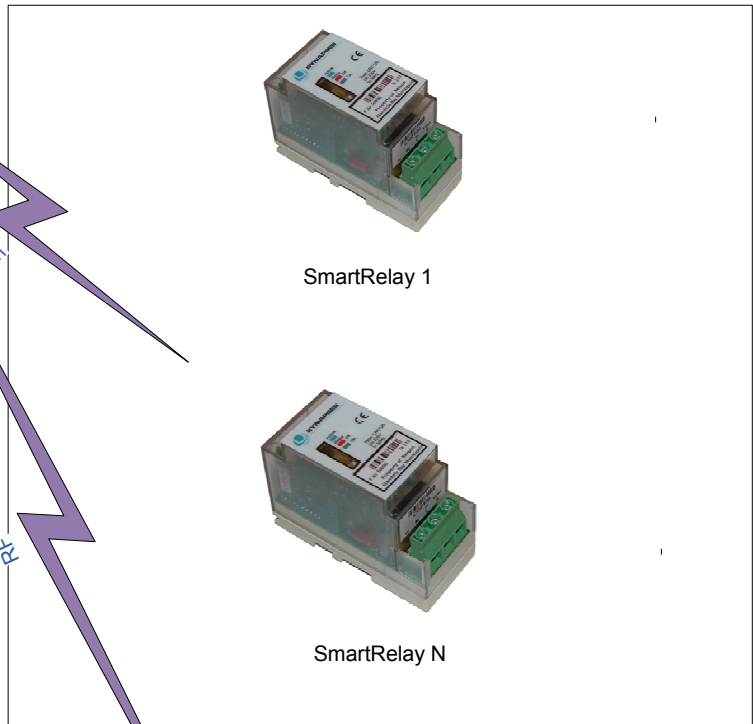

SmartRelay 1

SmartRelay N

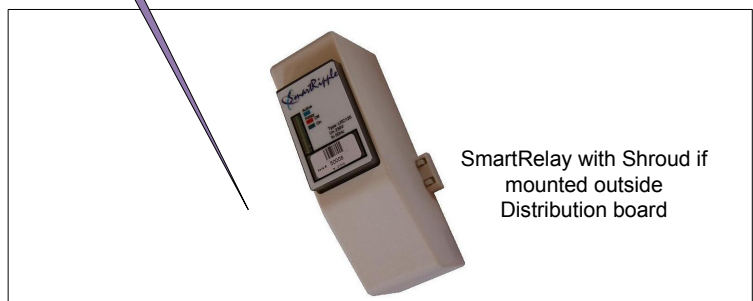

SmartRelay with Shroud if mounted outside Distribution board

SmartRelay

Pricing[excluding VAT]:

1. USB RF interface & Synapses configuration software : ZAR780-00
2. 20A SmartRelay : ZAR508-00
3. 30A SmartRelay : ZAR575-00
4. Shroud : ZAR12-40

Configuration from PC via USB RF interface.

1. 20 A relay. [also available in 30A option]
2. Relay On LED [Green]
3. Relay Off LED [Red]
4. Blue flashing active led.
5. 220 VAC input, 50Hz, 3 way connector..
6. 433 MHz RF communication interface.
7. Real Time Clock with backup for 24 hours.
8. Thermal protection.
9. Mini & DIN rail mountable.
10. Settable timer function, 48x 30 minute intervals.
11. Settable override function [On/Off]
12. Dimensions : W:38 mm, H:92 mm, D: 67 mm